


No 387

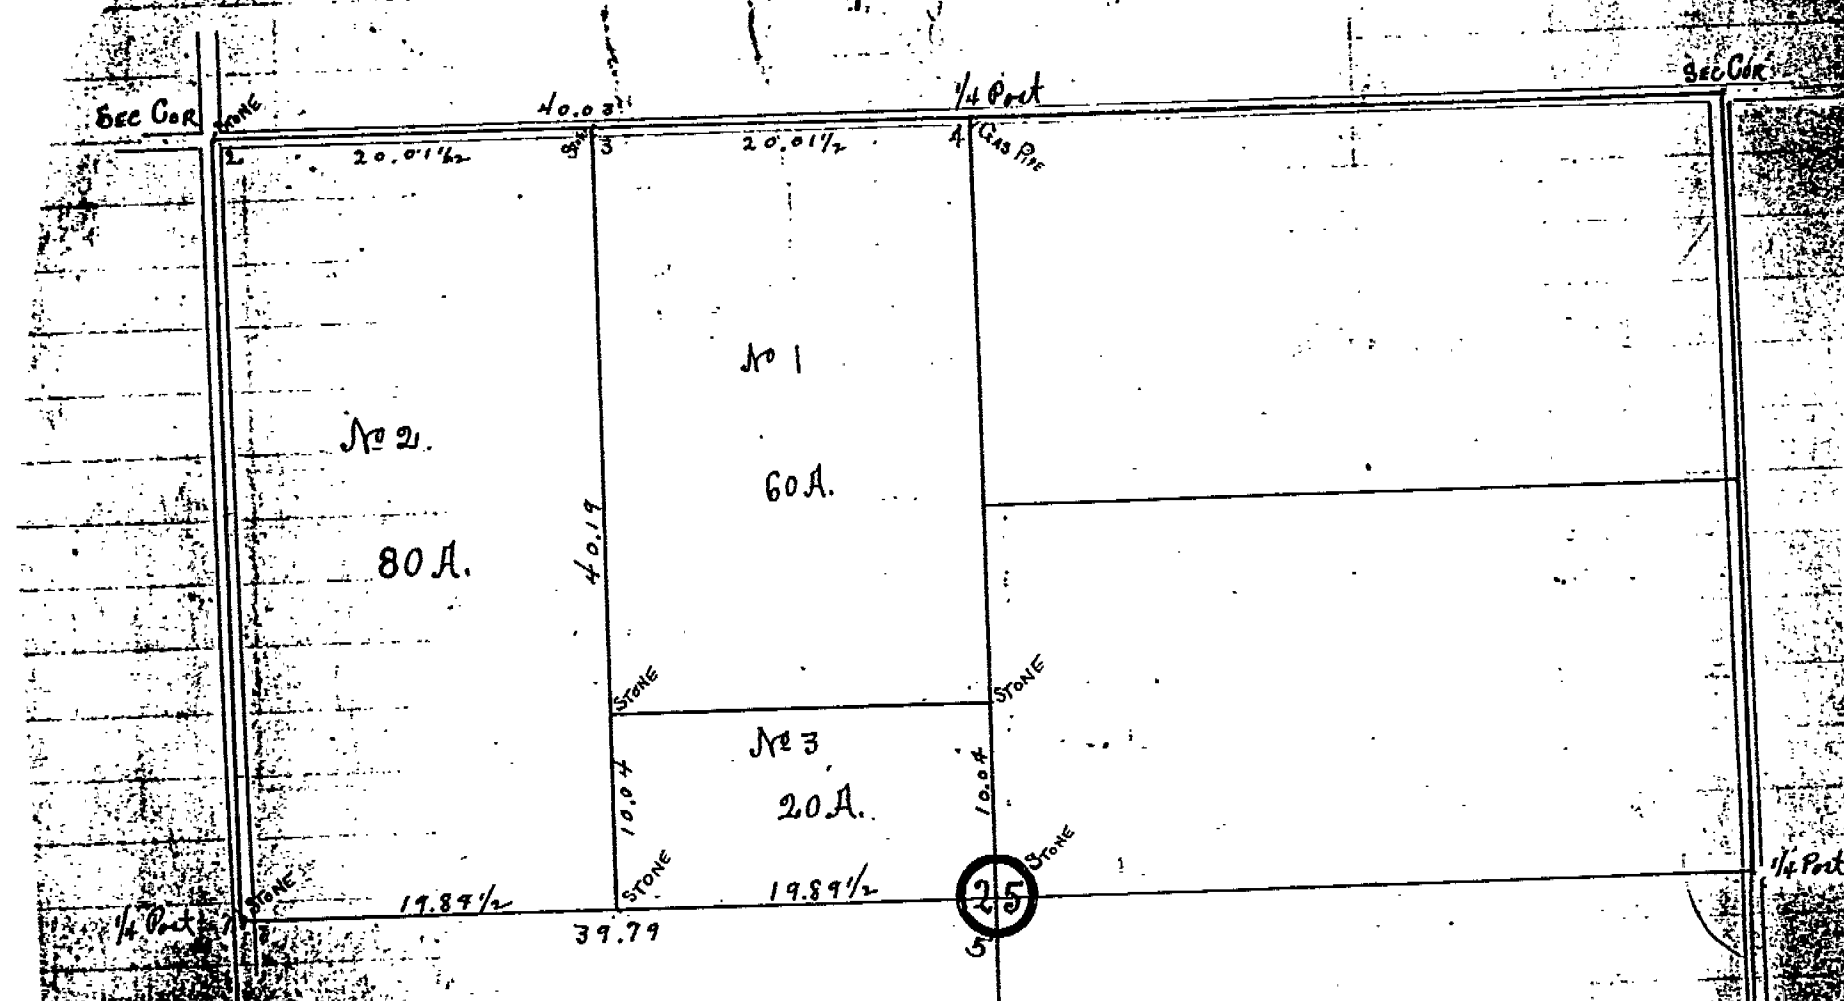

NOTES

1. West 1/4 post corner is sp. 2 of N. 13 E.
2. Found Government stake at top of 15 ft. and 8 ft. NW 1/4.
3. Put in new stone marks at top of sand stone cor. top.
4. North west corner of sec. 25 sp. 2 of N. 13 E. SAND STONE
5. Sand Stone cor. 1" gas pipe.
6. N. 1/4 Post of Sec. 25. sp. 2 of N. 13 E.
7. Found Government stake from stump of Bur Oak 24 ft. NW 1/4.
8. Found 1" gas pipe in and put broken tile around it.
9. Center of Sec. 25 sp. 2 of N. 13 E.
10. Rove stake in ground and put broken tile around.

Survey of the north west quarter of Section
Twenty five (25) Township Two (2) South Range
Thirteen (13) East.

No 1 For J. G. Berg.
2 " E. O. & F. Gottfried.
3 " Edward Rossmann


Surveyed May 22nd 1901
A. F. Schramberger
Surveyor W. O.

Crawford 32-1-13
W. 3 pg. 639

No. 681

Survey to Locate the Wyandot Reservation
Line Through Section 5 T 2 S. Range 13 East

- at ① Found Set Stone at N.W. corner of Indian Reserve
at ② set stone from 20' south of center of pike on reserve
line from which a Linden tree SW 35 feet and from
Linden tree to point where reserve line crosses
center of pike 42 1/2 feet.
at ③ placed in iron bolt.
Wash 30" AE 23 1/2 feet
at ④ found set stone on
south line of section 6 on reserve
line at ⑤ Found set stone
at 1/4 post to sections 6 and 7
at ⑥ found set stone
at ⑦ found set stone
at ⑧ found set stone
at ⑨ drove iron peg
at ⑩ Drove iron pin
at ⑪ Found set stone at H. H. Myers N.E. corner
at ⑫ set a stone 29.09 chains west of
the 3/4 post of section 6 from which
a line runs 30' bear S 75° E 29 links.

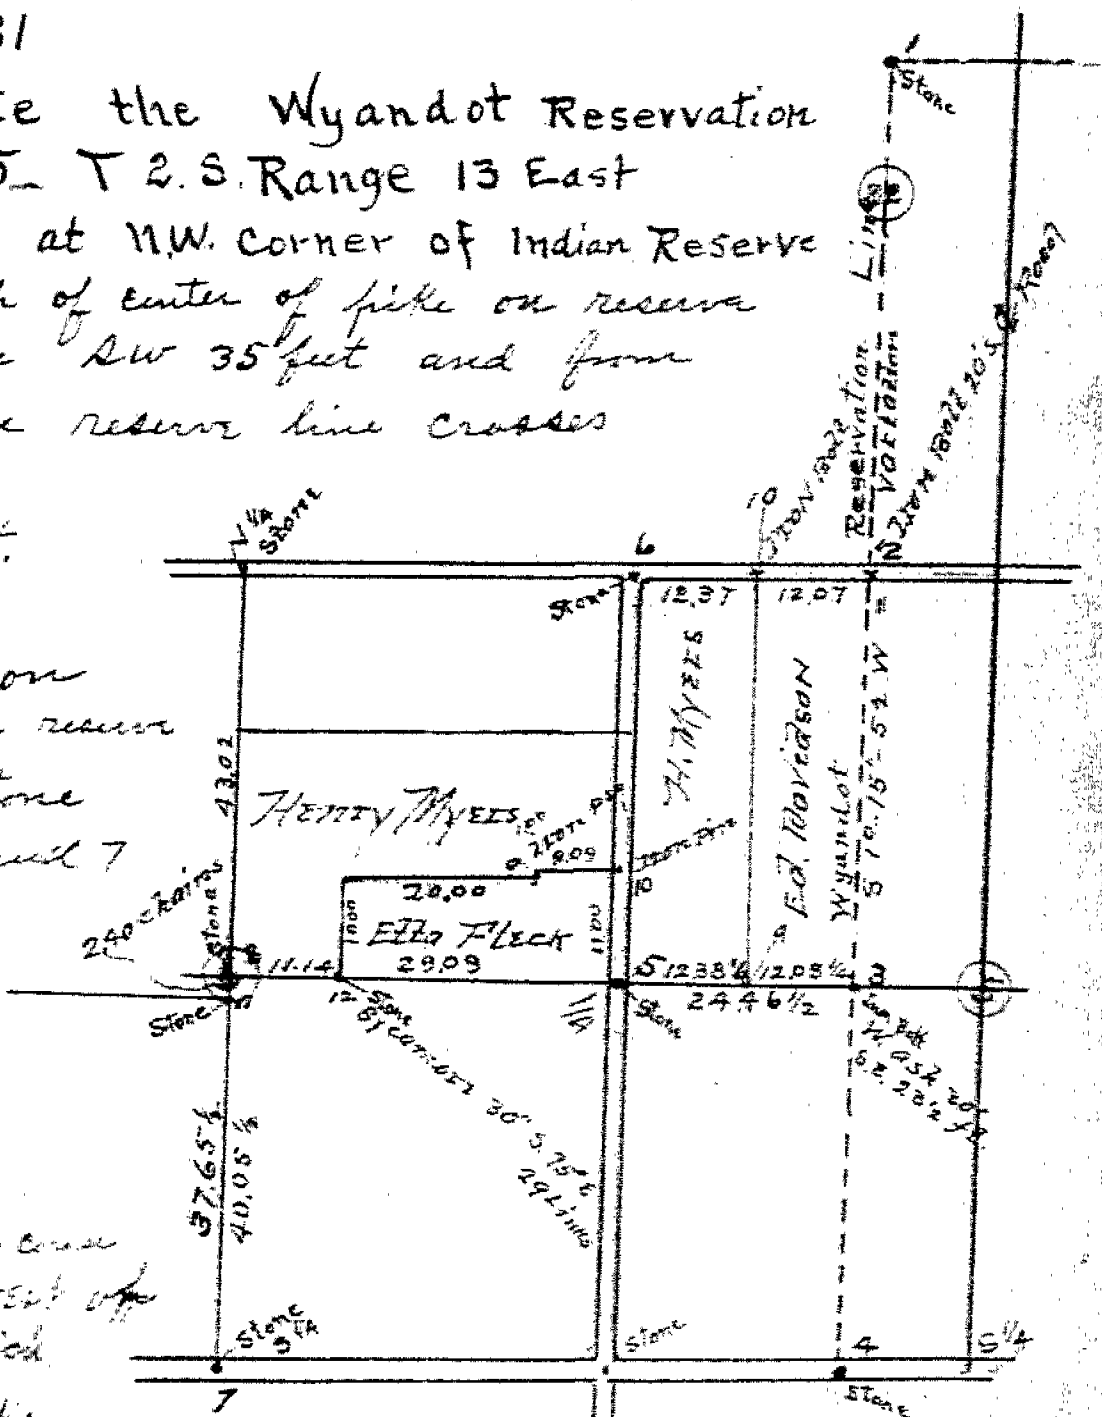

Surveyed Nov. 29th and 30th 1922 For Henry Myers
R. R. Dumm Deputy Co. Surveyor.

Chairman R. R. Dumm and
(S. E. Dumm)

Salem

5-2-13

6-2-13

Crawford

32-1-13