

SURVEY FOR - DON & CHARLES KARG

0 3/4" Ø PERSONALIZED IRON PIPE SET
PT. SE⁴ CITY OF
SEC. 29, UPPER SANDUSKY
T. 2 S., R. 14 E.
TWP.: CRANE
COUNTY: WYANDOT
OHIO.

0 100 200
SCALE: 1 INCH = 100 FEET

DEED REF.: VOL. 188, PG. 750
185, PG. 404
SURY. REF. VOL. 6, PG. 20

- 1- FOUND MON. BOX DOWN 2" OVER 1 1/2" PIN
IN TILE MARKER DOWN 5"
- 1- FOUND 1/2" IRON PIPE IN CONCRETE, FLUSH
- 1- FOUND 5/8" REBAR WITH 1 1/2" SURVEYOR'S CAP, FLUSH
- 1- FOUND 5/8" REBAR WITH 1 1/2" SURVEYOR'S CAP, FLUSH
- 1- FOUND 5/8" REBAR WITH 1 1/2" SURVEYOR'S CAP, DOWN 2"

PARCEL F, L, J, H = 0.014 AC.


A" IS AT NE. CORNER OF OLD MISSION ADD'N.

LINE	BEARING	DISTANCE
A-B	S 0° 19' 09" E *	40.00'
B-C	S 76° 52' 09" E	179.69'
C-D	S 72° 48' 07" E	138.10'
D-F	S 0° 10' 02" E	141.77'
F-G	N 90° W	38.83'
G-H	N 90° W	61.17'
H-J	S 0° 11' 38" E	6.00'
J-K	S 90° E	61.17'
L-J	N 90° W	100.00'
J-N	S 0° 11' 38" E	110.00'
N-M	S 90° E	100.00'
M-L	N 0° 11' 38" W	110.00'
N-Q	S 0° 11' 38" E	95.00'
Q-P	S 90° E	100.00'
P-M	N 0° 11' 38" W	95.00'
Q-R	S 0° 11' 38" E	95.00'
R-S	S 90° E	100.00'



LINE	BEARING	DISTANCE
S-P	N 0° 11' 38" W	95.00'
R-T	S 0° 11' 38" E	110.24'
T-U	N 89° 47' 21" E	100.00'
U-S	N 0° 11' 38" W	109.874'
H-V	N 90° W	19.95'
K-G	N 0° 11' 38" W	6.00'

* ASSUMED

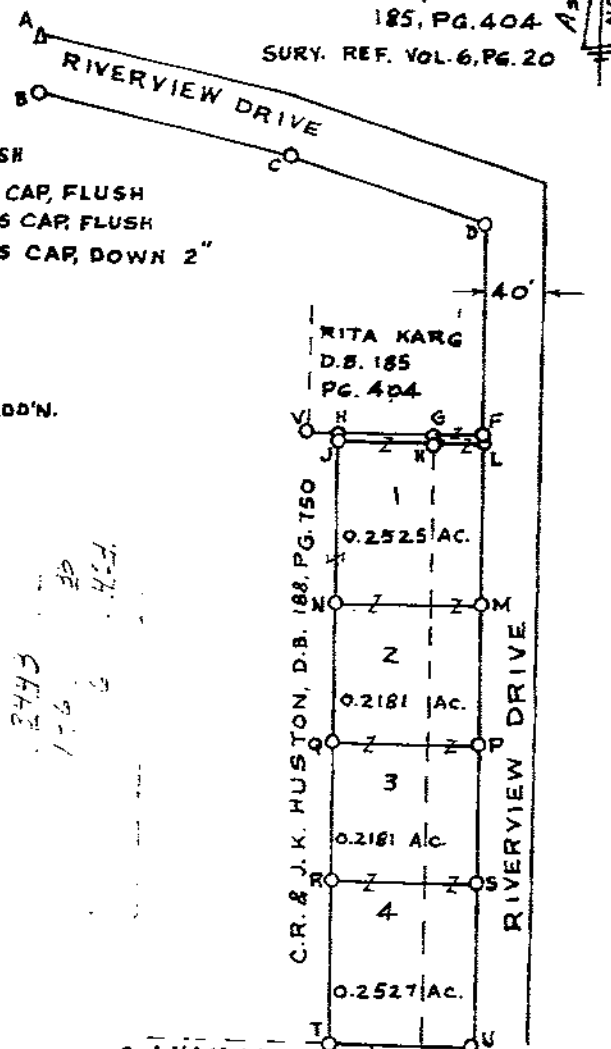

C.J. HAMNER,
ETUX. D.B. 174
PG. 269 & PG.
271

R.J. BROTT
D.B. 169
PG. 163

I Hereby Certify The Above Plat To Be True &
Correct According To A Survey.

Made in DEC. 9, 1987
Ohio Registered Surveyor No. 5647.

By Jerry B. Weininger
JERRY B. WEININGER

LANDS IN CRANE
29-2-14
VOL. 6,
PG. 424

TAX MAP COPY