

SURVEY FOR - CHARLES K. SHAW, ETAL.

0 $\frac{1}{2}$ ϕ PERSONALIZED IRON PIPE SET
PT. NW⁴
SEC. 4
T. 1 S, R. 14 E.
TWP.: TYMOCHTEE
COUNTY: WYANDOT
OHIO.

0 300 600
SCALE: 1 INCH = 300 FEET

DEED REF.: VOL. 168, PG. 158


SURV. REF. VOL. 4 PG. 281, NO. 997
SEE O.D.O.T. PLANS FOR BRIDGE WYA-53-24.12,
FOR POINTS D & G

ASSUMED
NORTH

LINE	BEARING	DISTANCE
A-B	N87°18'47"E*	697.854'
B-C	N28°22'54"E	6.264'
C-D	N28°22'54"E	618.63'
D-F	N27°57'12"E	561.87'
F-G	N27°57'12"E	38.23'
F-H	S63°33'E	36.996'
H-J	S63°33'E	293.23'
J-K	S63°33'E	16.78'
K-L	S3°15'E	333.91'
L-M	S3°15'E	515.86'
M-N	S3°15'E	3.61'
M-B	S87°18'47" W	920.29'

* ASSUMED

Survey No. 3522
RECORDED Nov 7 1988 S.R. 53
SURVEY RECORD VOL 6 PAGE 472
TAX MAP BY T. WYANDOT CO.

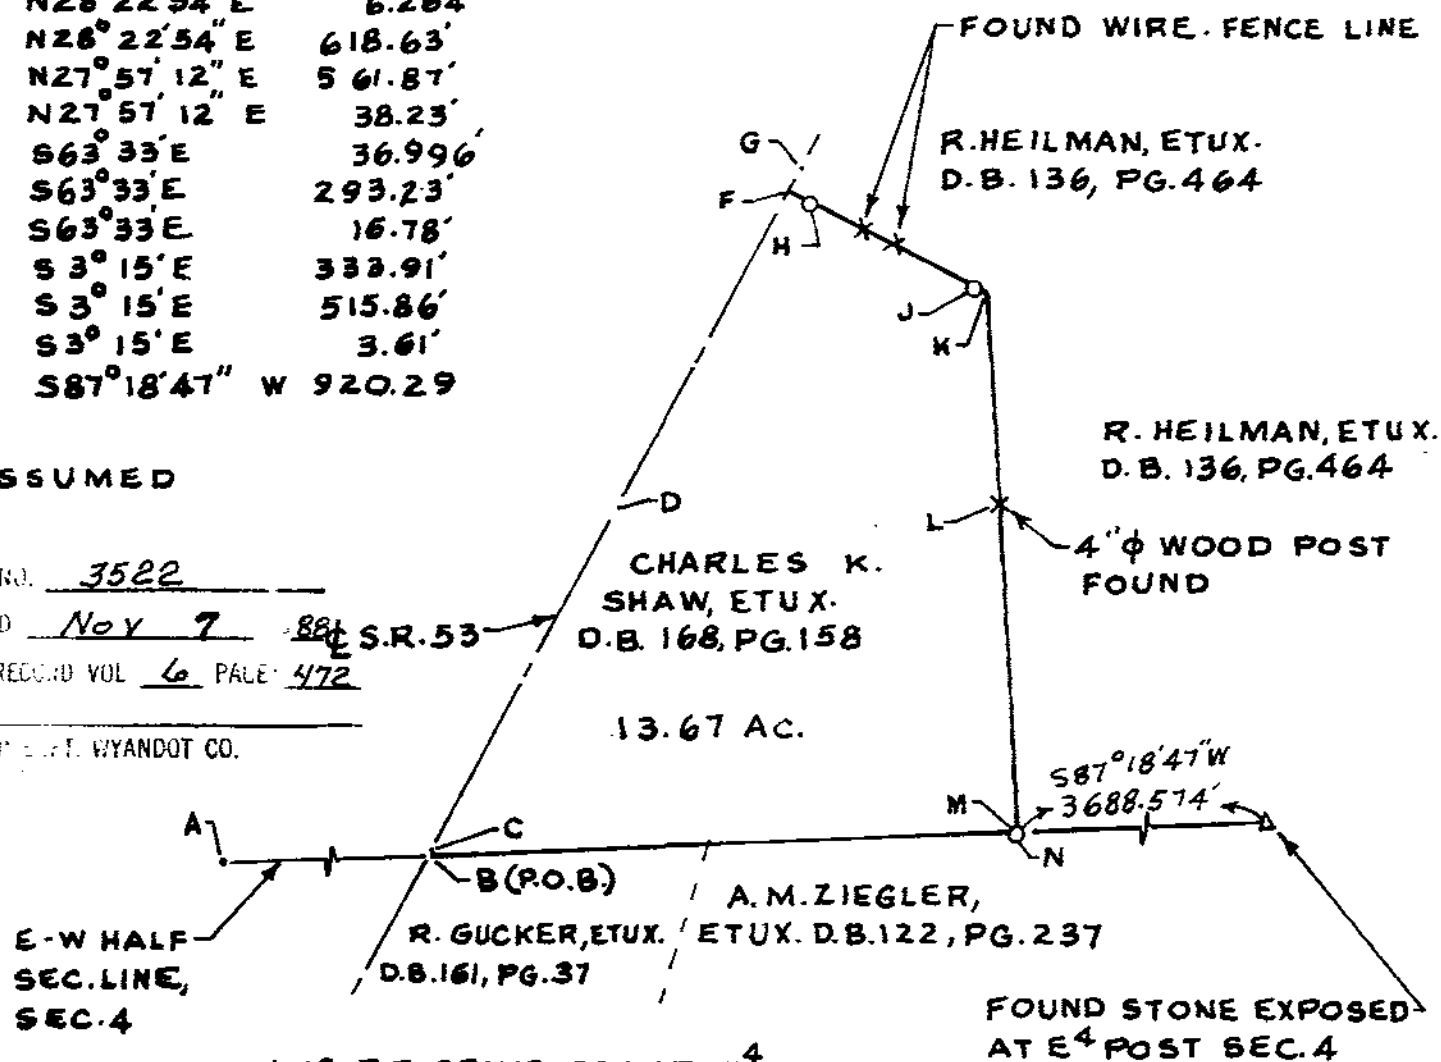

A IS R.R. SPIKE SET AT W⁴
POST SEC. 4 BY EXTENDING
LINE BETWEEN W⁴ POST SEC.
5 & CEN. POST SEC. 5

C IS HALF INCH ϕ HEAD NAIL
FOUND DOWN $1\frac{1}{2}$ " & USED AS A REFERENCE

D IS R.R. SPIKE FOUND DOWN
1" (STA. 1272, O.D.O.T. PLANS)

G IS R.R. SPIKE FOUND DOWN
1" (STA. 1278, O.D.O.T. PLANS)

POINTS H, J & N ARE
REFERENCE PIPES

N IS SET NEXT TO WOOD
POST, FOUND

I Hereby Certify The Above Plat To Be True &
Correct According To A Survey.

Made in OCT. 19, 1988

Ohio Registered Surveyor No. 5647.

By Jerry B. Weininger
JERRY B. WEININGER